

- IP20
- IP44
-
-

Type DE 02 65 ···	230V/ 50Hz/ l.p.f.	230V/ 60Hz/ l.p.f.	Weight kg
1x7/9W	701	703	1.8
2x7/9W	901	903	1.8
1x60W	150	150	0.9

other voltages on request

Application
cabins, lounges, dining rooms, accomodation areas, bath rooms

Approvals
according to the rules of relevant classification societies, additional VDE and IEC

Protection class
IP 44 in conjunction with ceiling

Housing
phosphate coated steel, powder coated white

Diffuser
polycarbonate, opal

Fascia
gold, silver, white

Lamp base
E 27 or G 23

Lamps (not included)
incandescent lamp max 60W or tubular compact fluorescent lamp 7W / 9W




Electric
flexible wiring, heat resistant up to +105°C

Cable entry
1 inlet, cable Ø max 11 mm

Mounting
3 mounting holes, Ø 4 mm

Options

- electronic ballast
- BO-execution

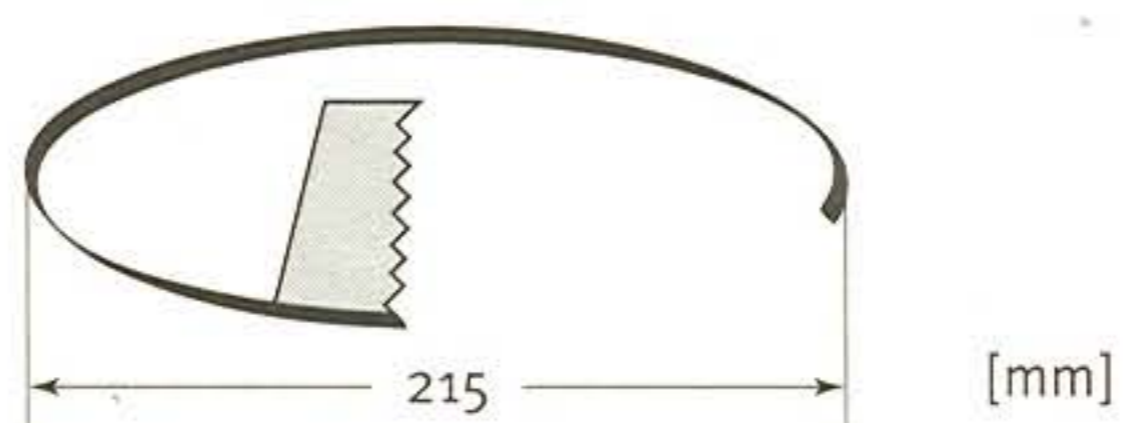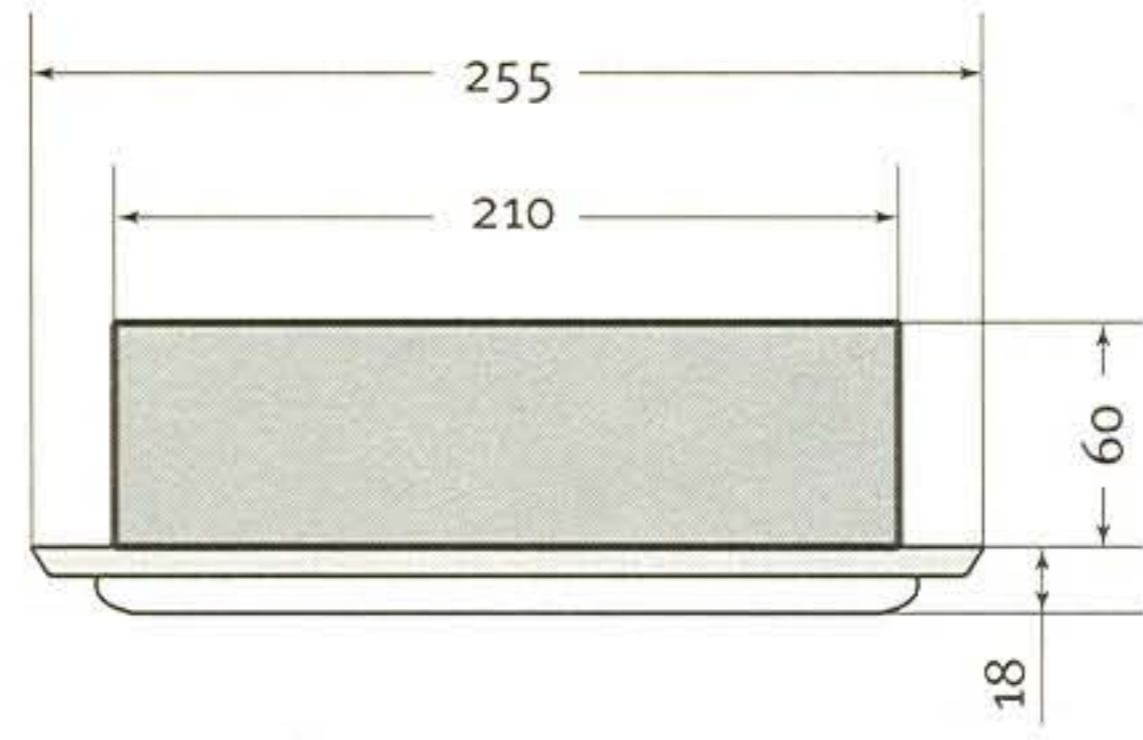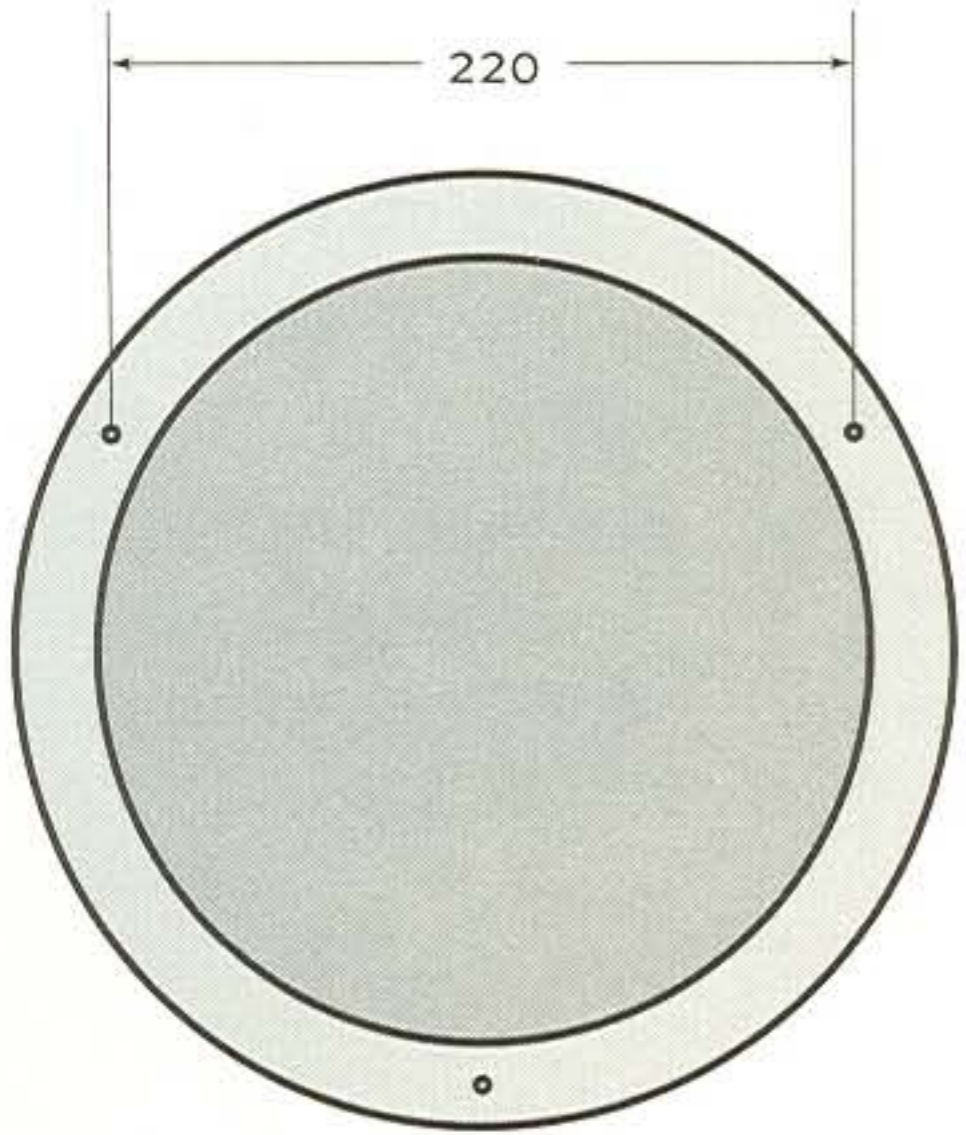

[mm]