



Application
 emergency light, illuminated sign for passage ways, public areas, etc.

Approvals
 according to the rules of relevant classification societies, additional VDE and IEC

Protection class
 IP 20

Housing
 zinc coated steel, powder coated white

Sign
 PMMA, list of standard pictograms are available, other pictograms on customers requirements

Lamp base
 G 5

Lamps (not included)
 fluorescent lamp 6W

Electric
 230V, 50Hz or 60Hz, other voltages on request, flexible wiring, heat resistant up to +105°C


Cable entry
 3-pole plug

Mounting
 4 mounting holes, Ø 4.5 mm
 cut out 237 x 53 mm

Weight
 1.3 kg

Options

- electronic ballast
- battery backup system
- different heights of signs

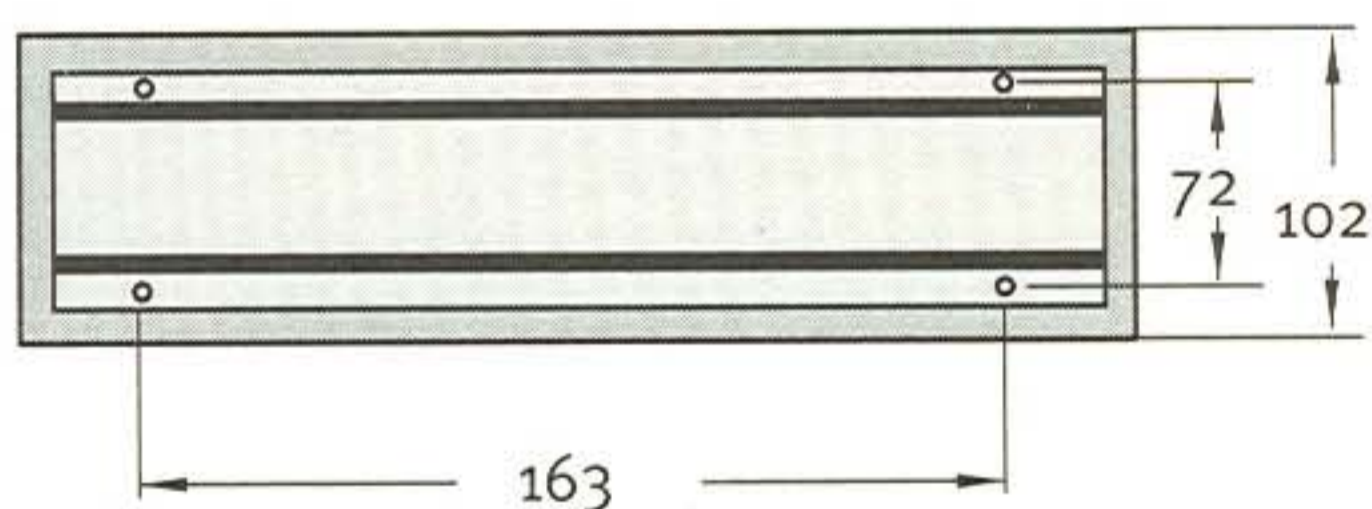

[mm]

