
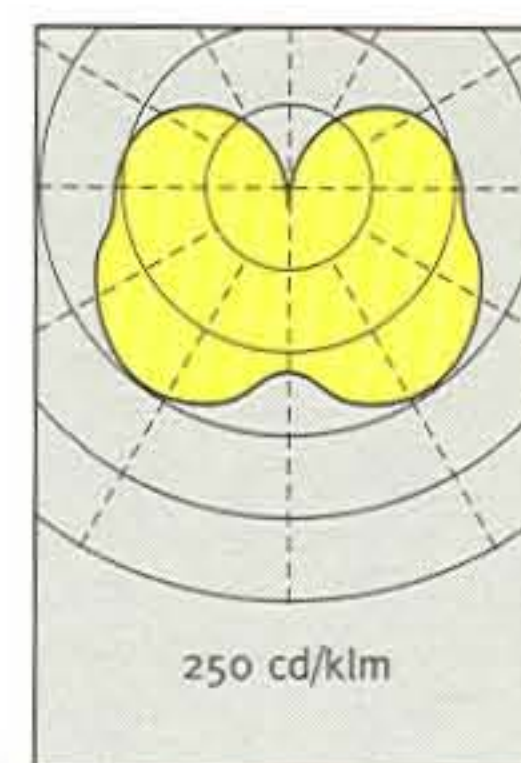


Mirror Luminaire, surface, 1x11W / 1x15W / 1x18W / 1x30W

SP 66

4

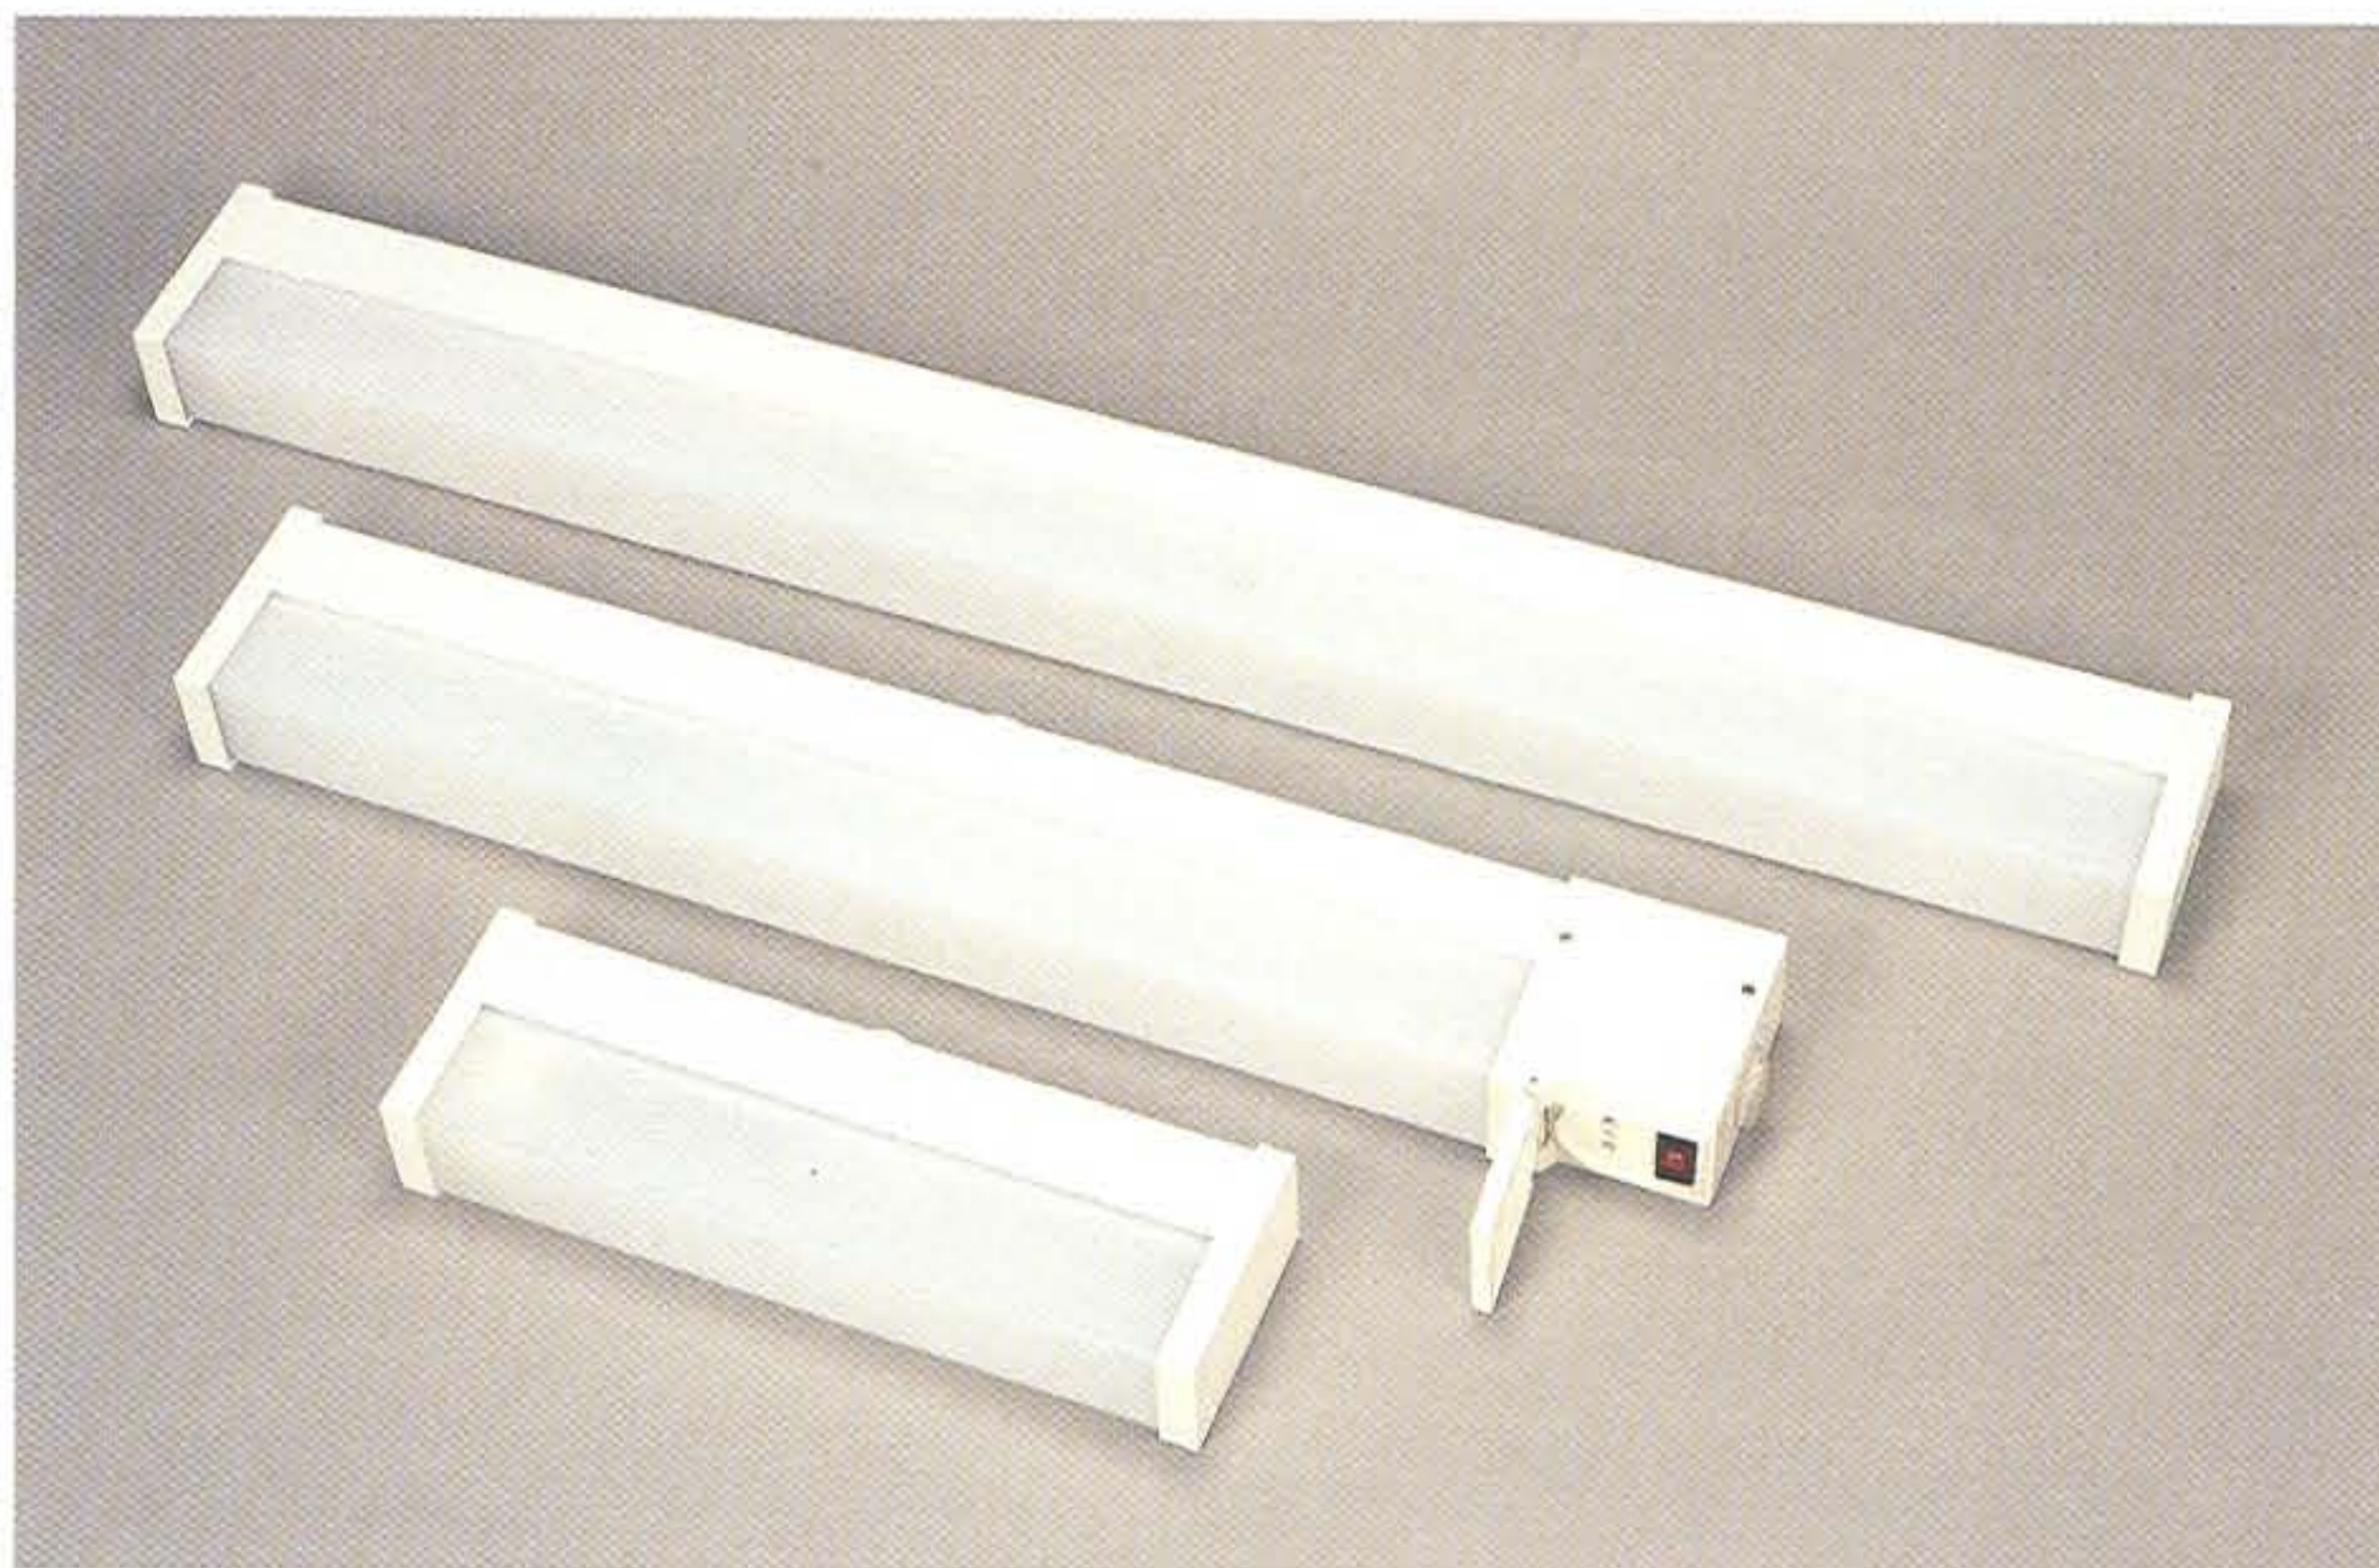

Type SP66	230V/ 50Hz/ l.p.f.	230V/ 50Hz/ h.p.f.c.	230V/ 60Hz/ l.p.f.	230V/ 60Hz/ h.p.f.c.	Weight kg
1x11W	601	602	603	604	1.7
1x15W	001	002	003	004	1.8
1x18W	201	202	203	204	1.9
1x30W	801	802	803	804	2.5

other voltages on request

Application

cabins, shower rooms,
toilets, accomodation
areas

Approvals

according to the rules
of relevant classification
societies, additional VDE
and IEC

Protection class

IP 44

Housing

phosphate coated steel,
powder coated white

Diffuser

PMMA, opal

Lamp base

G 13 or G 23

Lamps (not included)

11W= tubular compact
fluorescent lamp
15W/ 18W/ 30W=
fluorescent lamp

Cable entry

2 inlets,
cable max Ø 11 mm

Electric

flexible wiring, heat
resistant up to +105°C

Specification

see table 1

Mounting

2 mounting holes,
Ø 6 mm

Options

- Schuko-type socket
on request

table 1

Type SP 66	Description
SP66 ... 00	two plastic endcaps
SP66 ... 03	isolating transformer, universal socket, 2-pole on/off switch, 230V/110V selector switch
SP66 ... 04	isolating transformer, universal socket, 230V/110V selector switch
SP66 ... 06	2-pole on/off switch