


# Watertight Luminaire, surface, 1x18W / 2x18W / 1x36W / 2x36W

TL 45



2

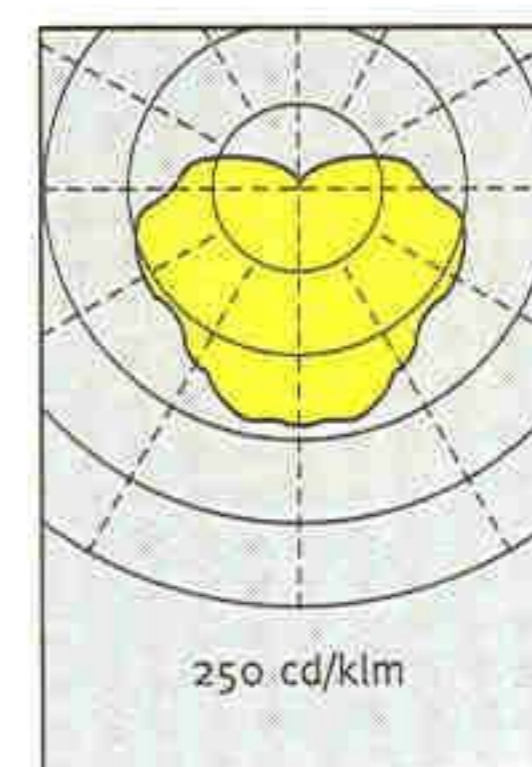

Type	230V/ 50Hz/ l.p.f.	230V/ 50Hz/ h.p.f.c.	230V/ 60Hz/ l.p.f.	230V/ 60Hz/ h.p.f.c.	Weight kg
1x18W	5105 0015 ..	5105 0015 ..-001	5105 0015 ..-002	5105 0015..-003	2.5
2x18W	5105 0016 ..	5105 0016 ..-001	5105 0016 ..-002	5105 0016 ..-003	3.5
1x36W	5105 0017..	5105 0017 ..-001	5105 0017 ..-002	5105 0017 ..-003	3.7
2x36W	5105 0018 ..	5105 0018 ..-001	5105 0018 ..-002	5105 0018 ..-003	5.3

other voltages on request

## Application

workshops, engineer rooms, stores, etc.

## Approvals

according to the rules of relevant classification societies, additional VDE and IEC

## Protection class

IP 67

## Housing

polyester, reinforced

## Diffuser

polycarbonate, prismatic clear

## Lamp base

G 13

## Lamps (not included)

fluorescent lamp  
18W / 36W

## Electric

flexible wiring, heat resistant up to +105°C

## Cable entry


2 plastic cable glands  
Pg13.5  
cable max Ø 12 mm

## Mounting

2 mounting holes,  
Ø 6 mm

## Options

- electronic ballast
- mounting on pre-installed screw

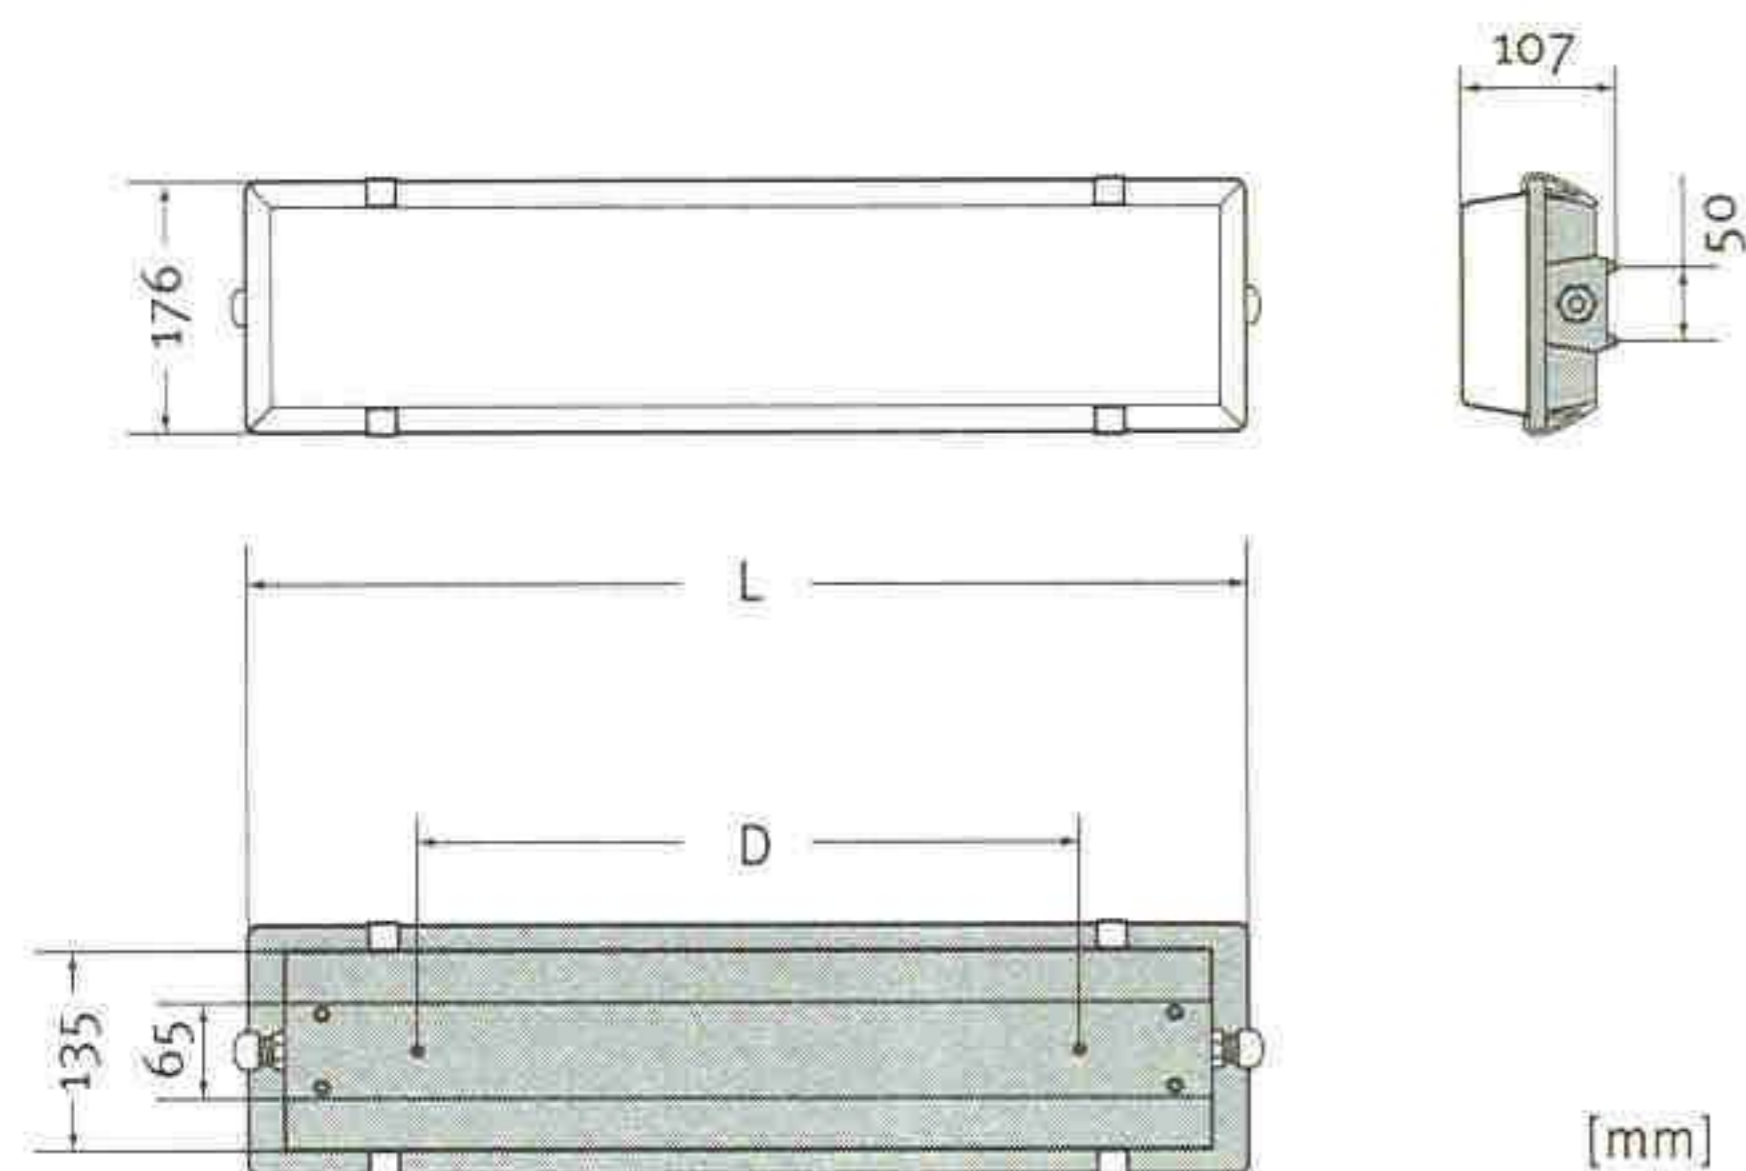

[mm]

Type	L mm	D mm
TL 45 / 18W	678	450
TL 45 / 36W	1288	800