

| Type Part-no. | 230V/ 50Hz/ h.p.f.c. | 230V/ 60Hz/ h.p.f.c. | Weight kg |
|------------------|-------------------------|-------------------------|--------------|
| 2x18W | 5106 0001 .. | 5106 0001 ..-003 | 4.6 |
| 2x36W | 5106 0002 .. | 5106 0002 ..-003 | 6.7 |

other voltages on request

Applications

galley, kitchen, pantries, provision rooms

Approvals

according to the regulations USPH (U.S. Public Health) and the rules of relevant classification societies, additional VDE and IEC

Protection class

IP 55

Baseplate

stainless steel

Diffuser

polycarbonate, clear

Gasket

silicone rubber

Lamp base

G 13

Lamps (not included)

fluorescent lamp

18W / 36W

Electric

flexible wiring, heat resistant up to +105°C

Cable entry


2 plastic cable glands Pg 13.5, cable max Ø 12 mm

Mounting


6 / 8 mounting holes, Ø 5 mm

Options

- electronic ballast

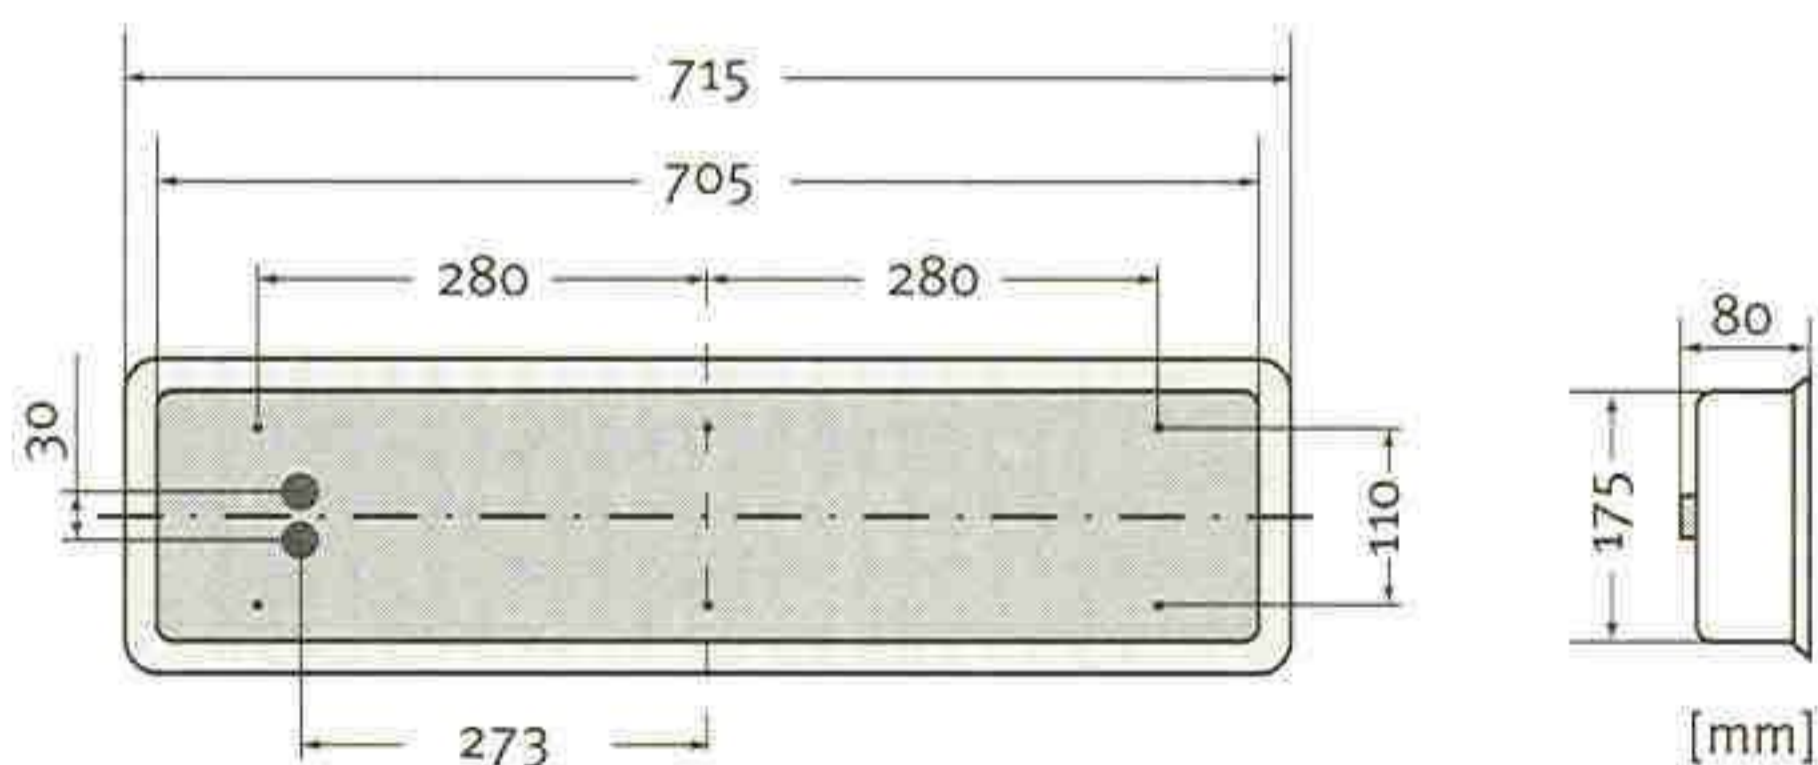

Type 18W

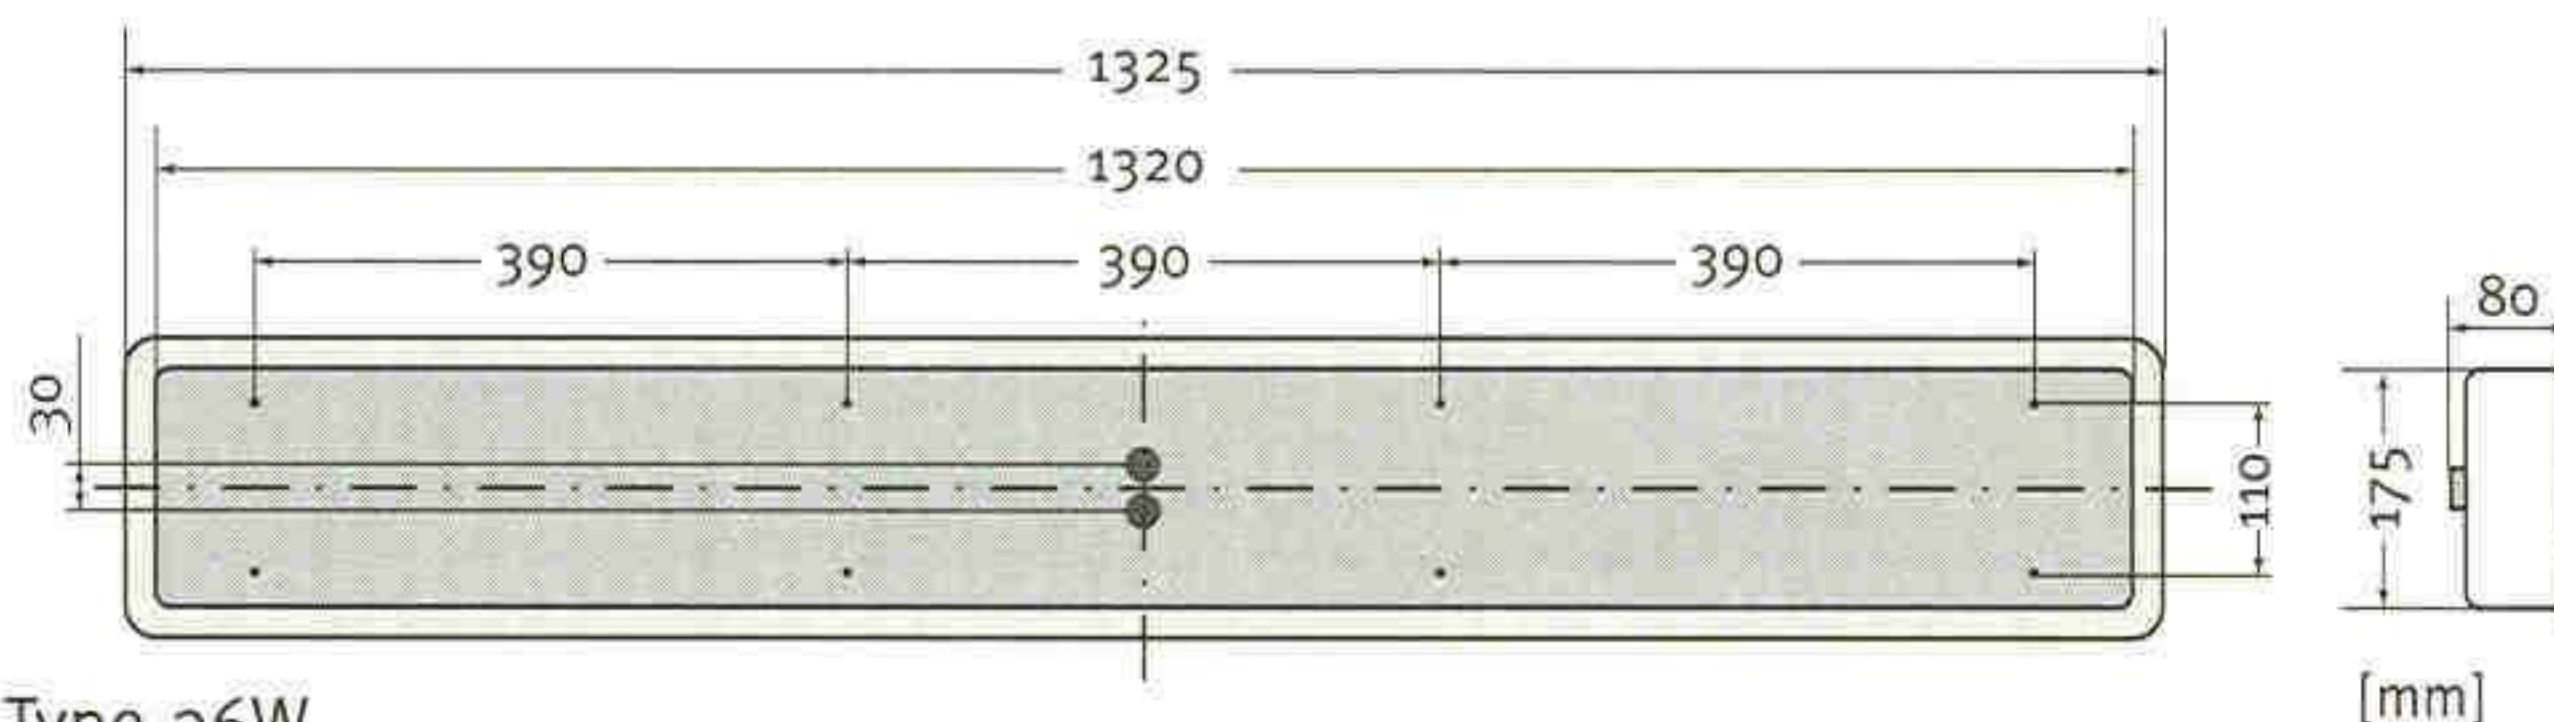

Type 36W