

# Watertight Luminaire, surface,


1x18W / 2x18W / 1x36W / 2x36W

TL 44 ... 00


2



18W

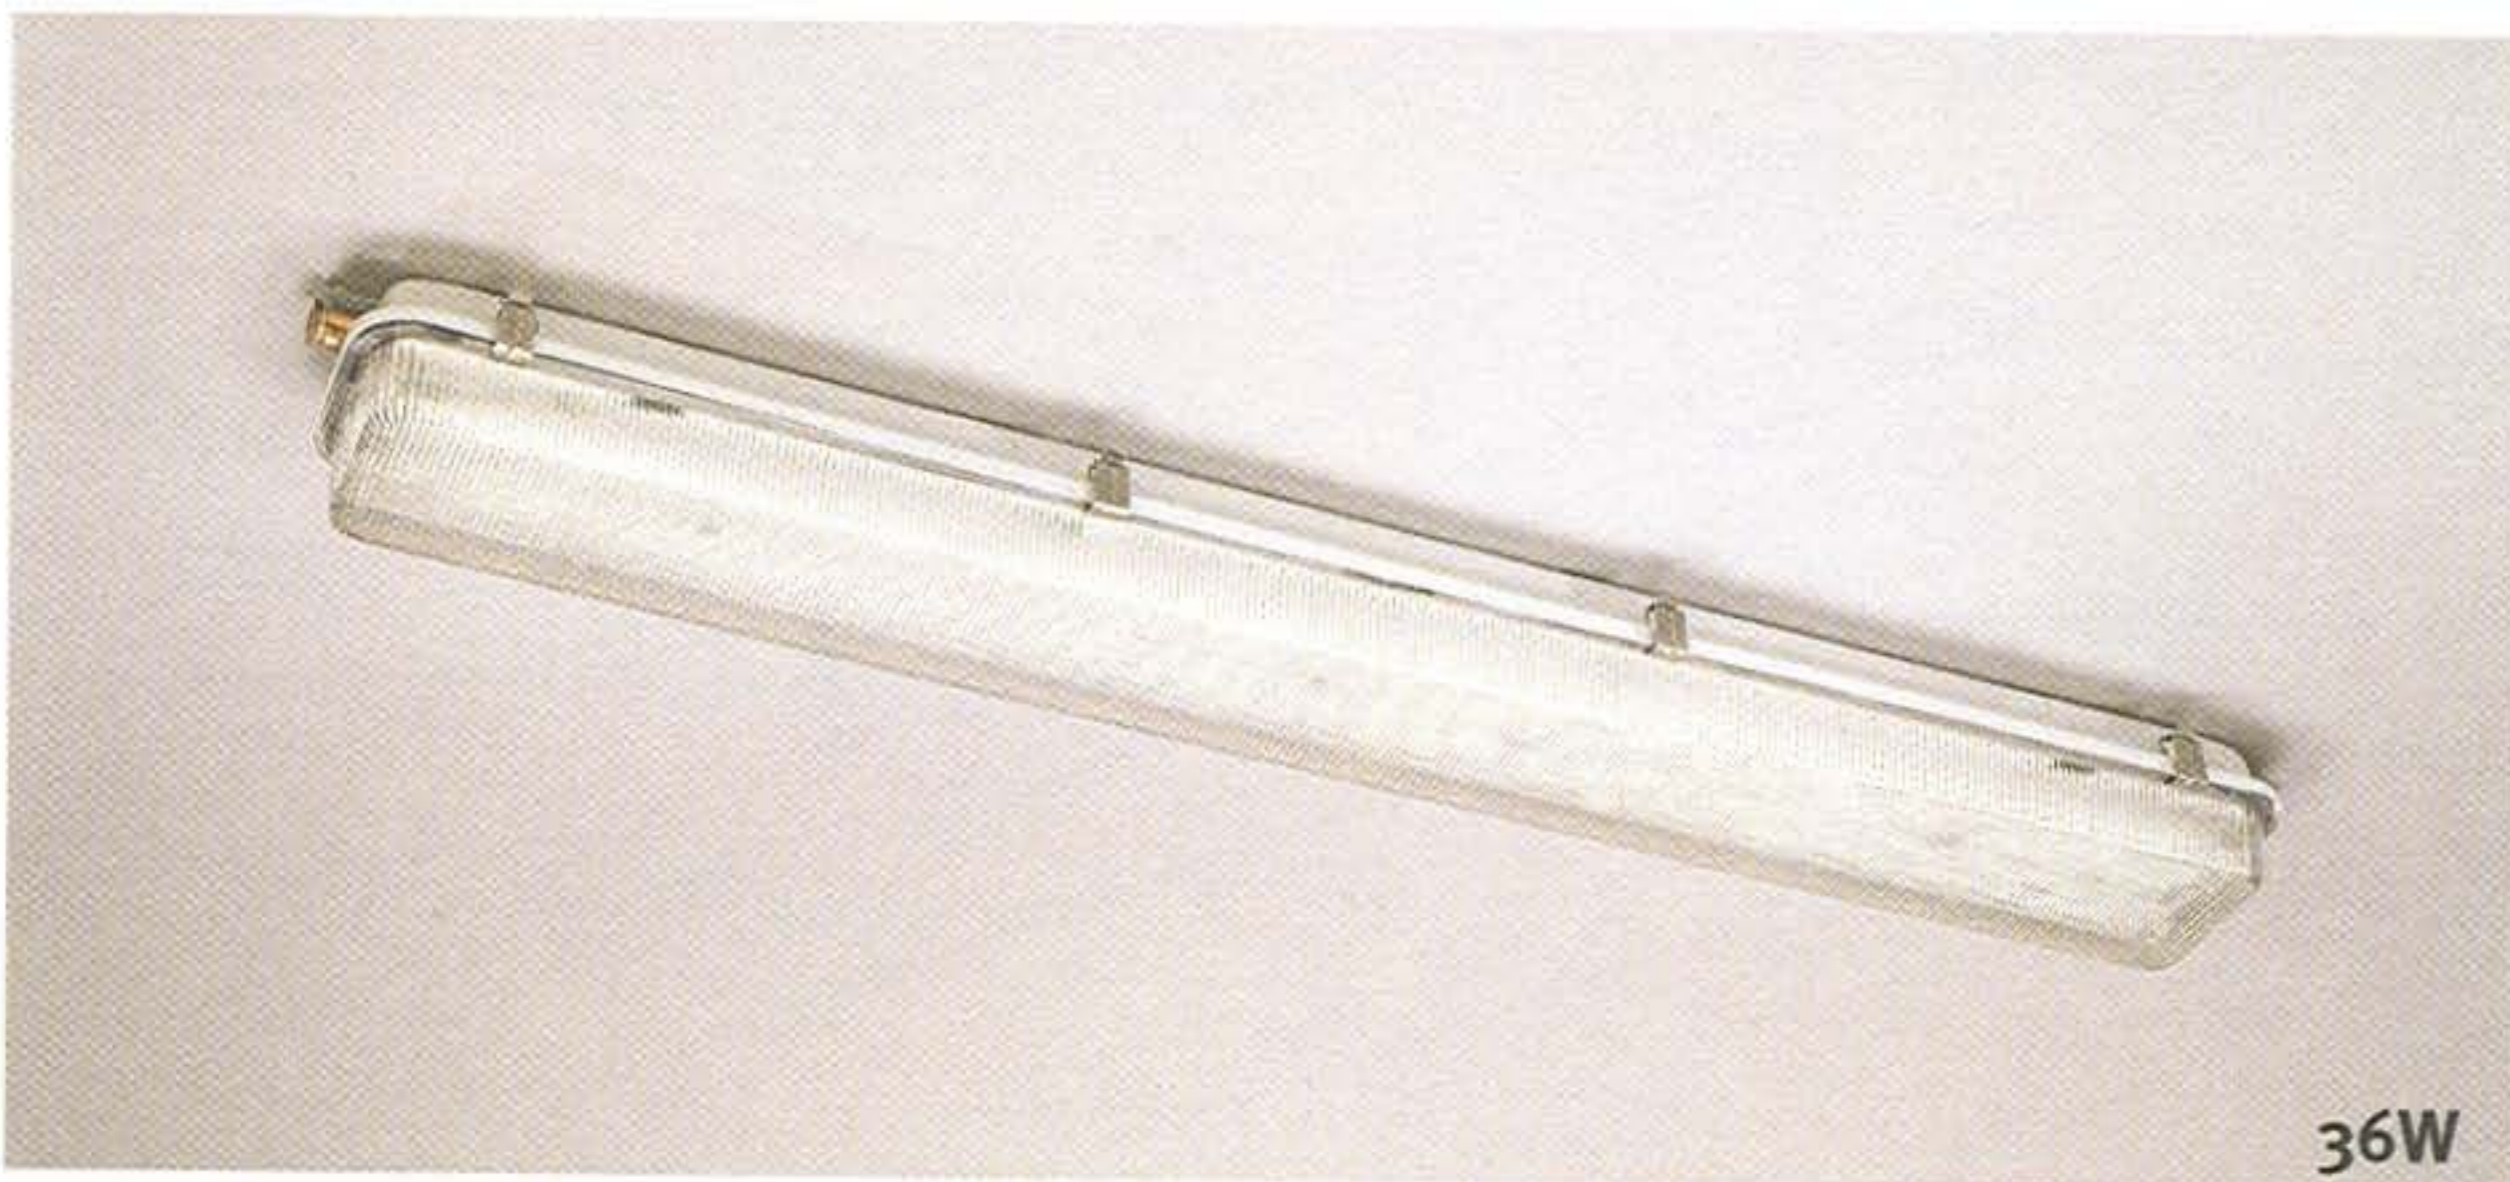

36W

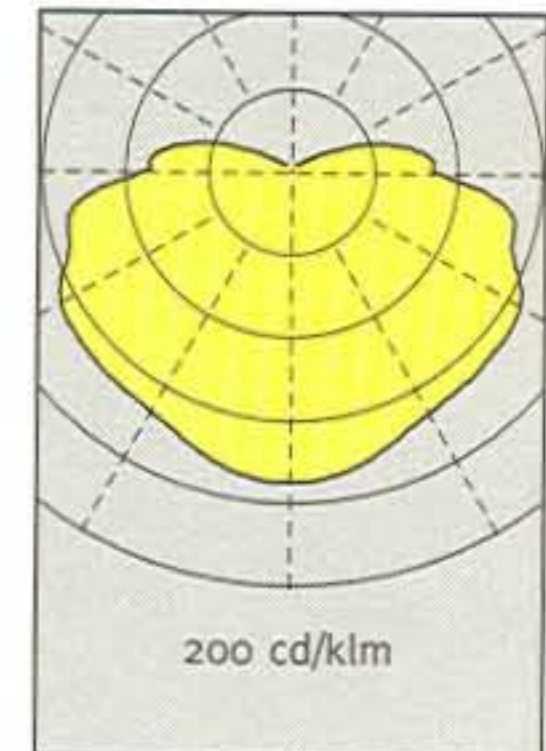

Type TL 44 ... 00	230V/ 50Hz/ l.p.f.	230V/ 50Hz/ h.p.f.c.	230V/ 60Hz/ l.p.f.	230V/ 60Hz/ h.p.f.c.	Weight kg
1x18W	005	006	007	008	4.8
2x18W	205	206	207	208	5.3
1x36W	305	306	307	308	6.1
2x36W	405	406	407	408	6.6

other voltages on request

### Application

multipurpose luminaire for engine rooms, stores, etc.

### Approvals

according to the rules of relevant classification societies, additional VDE and IEC

### Protection class

IP 67

### Housing

zinc coated steel, seamless deep drawn, powder coated white

### Diffuser

polycarbonate, prismatic clear

### Lamp base

G 13

### Lamps (not included)

fluorescent lamp  
18W / 36W

### Electric

flexible wiring, heat resistant up to +105°C

### Cable entry

max 4 cable glands, to be ordered separately

### Mounting

2 mounting holes, Ø 9 mm

### Options:

- stainless steel housing
- opal diffuser
- electronic ballast
- outside junction box
- battery backup system
- a choice of different mounting sets are available